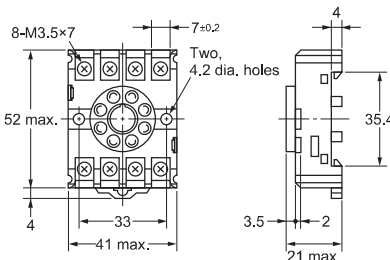

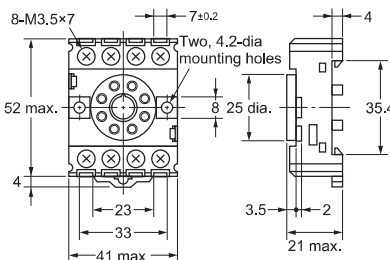

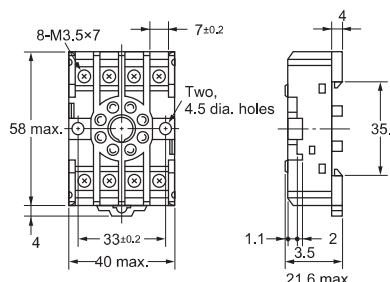

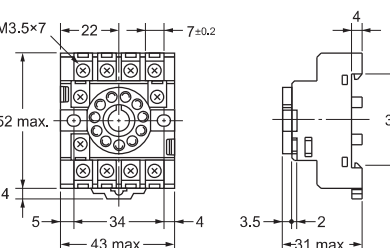


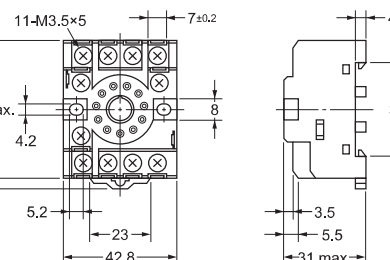


PF

(Unit: mm)








Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
PF083A 	 (Top View)	
PF083A-E 		 Note: Track mounting is also possible.
PF085A 	 (Top View)	
PF113A 	 (Top View)	 Note: Track mounting is also possible.
PF113A-E 		

Note: 1. For the PF083A and PF113A, the Socket key slot is on the top. (Applicable model: MK)

2. The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.

PYFZ/PYF

(Unit: mm)

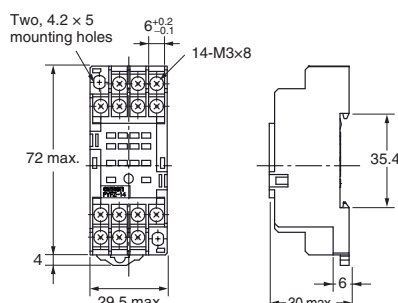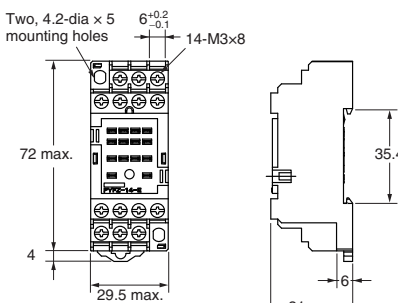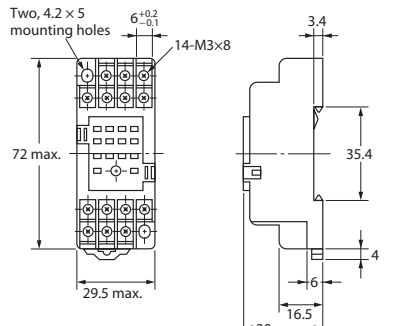Dimensions		Terminal Arrangement/Internal Connections	Mounting Hole Dimensions
PYFZ-14 		 (Top View)	 (Top View) Note: Track mounting is also possible.
PYFZ-14-E (Finger Protection Structure) 			
PYF14A 		 (Top View)	 (Top View) Note: Track mounting is also possible.
PYF14A-E (Finger Protection Structure) 