


MK General-Purpose Relay



MK2P

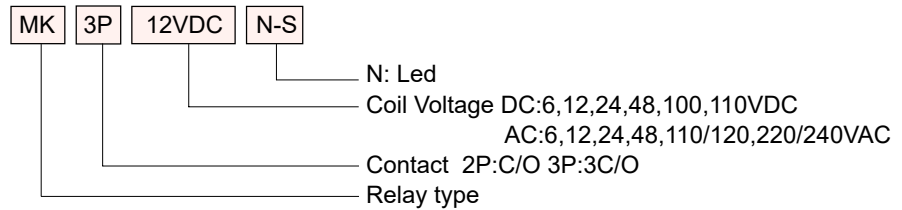

MK3P

Socket type



PF085A



PF113A-E

Contact Ratings

Contact Ratings	2NO+2NC	3NO+3NC
Contact Resistance		50mΩ(1A 6VDC)
Contact capacity	28VDC	10A(NO/NC)
	250VAC	5A(NO/NC)

Specification

Insulation Resistance	500MΩ, 500VDC	
Dielectric Strength	BCC	1500Vr.m.s 1minute
	BOC	1000Vr.m.s 1minute
Operate Time	30ms /20ms	
Terminal Type	Socket	


Coil Ratings

Nominal Coil Power	1.5W/2.5VA
--------------------	------------

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω:±10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω:±10%
6	4.8	0.60	22.5	6	4.80	1.80	5.5
12	9.6	1.20	90	12	9.60	3.60	21.5
24	19.2	2.40	430	24	19.2	7.20	72
48	38.4	4.80	1600	48	38.4	14.4	420
100	80.0	10.0	7550	110/120	88.0	36.0	1512
110	88.0	11.0	9000	220/240	176	72.0	6050/7200

Dimension.Bottom View

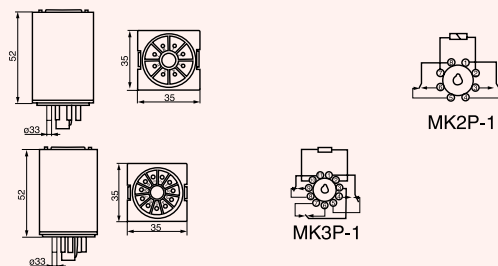

Reference Data

